

**Citation:**

**Mennill DJ, Battiston M, Wilson DR, Foote JR, Doucet SM (2012) Field test of an affordable, portable, wireless microphone array for spatial monitoring of animal ecology and behaviour. *Methods in Ecology and Evolution*, 3: 704–712. doi: 10.1111/j.2041-210X.2012.00209.x**

Title: Field test of an affordable, portable, wireless microphone array for spatial monitoring of animal ecology and behaviour

Authors: Daniel J. Mennill<sup>1</sup>, Matthew Battiston<sup>1</sup>, David R. Wilson<sup>1</sup>, Jennifer R. Foote<sup>2</sup>, and Stéphanie M. Doucet<sup>1</sup>

<sup>1</sup> Department of Biological Sciences, University of Windsor, Windsor, Ontario N9B3P4, Canada

<sup>2</sup> Department of Biology, Algoma University, Sault Ste. Marie, Ontario P6A2G4, Canada

Running title: Field test of a portable wireless microphone array

Word count: 6943 plus 2 figures and 1 table and an online supplement

Correspondence: Daniel J. Mennill  
401 Sunset Ave, Biology Building  
University of Windsor  
Windsor, Ontario, Canada N9B3P4  
e-mail: dmennill@uwindsor.ca

## Summary

1. Using arrays of microphones, biologists can monitor the position of free-living animals based on the sounds they produce. Microphone array technology exploits differences in sound arrival times at each microphone to calculate an animal's position. This technology provides new opportunities for studying animal ecology and behaviour and has many advantages over tracking technologies that require capturing animals and fitting them with external devices, or technologies that focus on one individual in isolation of the activities of nearby animals.
2. The efficacy of microphone arrays for triangulating the position of wild animals has been established through previous studies. Yet widespread use of microphone array technology has been limited by many factors: arrays are expensive, custom-manufactured, and cumbersome. Consequently, microphone arrays are used infrequently, in spite of their transformative potential for studying animal ecology and behaviour.
3. We conducted a field test of a new wireless microphone array system that has multiple advantages over previous systems: it is relatively inexpensive, commercially available, includes an integrated global-positioning system (GPS) for time-synchronizing microphones, and it is small enough to fit in a backpack. We set up an array of four stereo recorders (each with a pair of stereo microphones) at 12 sites and tested the system's accuracy for estimating the location of loudspeakers broadcasting 25 types of bird, mammal, and frog sounds.
4. We found that this system produced accurate location estimates based on multi-channel recordings of many types of acoustic signals. The average location accuracy was  $1.8 \pm 0.1$  m, on par with cable-based microphone array systems. Location accuracy was significantly higher when the recorders were closer together and when sounds were broadcast inside the area bounded by the microphones. Accuracy tended to be higher in field versus forest habitats.

5. We discuss how this system may be used to enhance studies of animal ecology and behaviour across a wide range of contexts. As with previous arrays, this system will allow researchers to monitor animals that produce distinctive acoustic signals. In contrast to previous microphone arrays, this system is affordable, portable, and commercially available. Consequently this system stands to dramatically enhance research on wild, free-living animals.

**Key-words** Acoustic monitoring · bioacoustics · field research · localization · microphone array · position estimation

## Introduction

Many animals are difficult to observe. Researchers have struggled to monitor the ecology and behaviour of animals that live in thick vegetation, animals that are active nocturnally, animals that travel over large distances, and animals that change their behaviour in the presence of human observers. Arrays of simultaneously-recording microphones provide a tool for passively monitoring such animals, using subtle delays in sound arrival time to estimate the position of animals based on the sounds they produce (Blumstein et al. 2011). Microphone array technology can be used to study any animal that makes distinctive sounds and it presents an important tool for ecologists, behavioural biologists, and conservation biologists.

The advantages of using microphone arrays to study animals are plentiful. (1) Array recordings allow biologists to estimate the position of animals in their natural environment, providing a spatial context for monitoring and measuring animal movement. (2) Animals can be studied with minimal invasiveness, where animals need not be captured, constrained, or fitted with tracking devices. (3) Multiple animals can be studied simultaneously, and their interactions can be studied in the natural context of a communication network (McGregor 2005). (4) Animals can be monitored while human observers are absent from the area, so that animal movement patterns are not influenced by the presence of observers. (5) Monitoring can be conducted over very long time periods, exceeding the logistic possibilities of direct observation. (6) Animals can be monitored at night, or in thick vegetation, or in other situations where visual tracking would be difficult or impossible. The primary disadvantage of microphone array technology is that it focuses on acoustic behaviours; microphone arrays cannot be used to study silent animals.

Terrestrial microphone arrays pose logistical challenges because sound attenuates rapidly in air, requiring that microphones be positioned around the study animals, and in close proximity to the study

animals, to collect suitable recordings (Bradbury and Vehrencamp 2011). Furthermore, spatial monitoring requires precise coordination of the recordings from each microphone, which is difficult to accomplish for microphones that are separated spatially. To ensure precise coordination of all microphones in terrestrial arrays, some researchers have relied on kilometres of microphone cable to connect microphones to a central, multi-channel recorder (e.g. Fitzsimmons et al. 2008a; Mennill and Vehrencamp 2008; Patricelli and Krakauer 2010; Lapierre et al. 2011). Others have used radio-transmission to relay sounds from distant microphones to a central, multi-channel recorder (Burt and Vehrencamp 2005). The amount of effort to set up cable-based arrays, and challenges with radio-transmission through thick vegetation, have limited the proliferation of microphone array technology. An ideal microphone array would consist of independent recorders that aren't constrained by kilometres of cable or complex radio-transmission devices. But the clocks of independent recording devices drift apart over time (Schmid et al. 2010), producing timing errors that diminish or eliminate the ability to accurately estimate the position of the sound source (Blumstein et al. 2011). One solution to this problem is to integrate a global-positioning system (GPS) into the recording devices to synchronize their clocks relative to an external time signal.

Autonomous recorders with integrated GPS time coordination have recently become available commercially, making microphone arrays accessible to a broad user group for the first time. We tested the accuracy of an array of GPS-synchronized digital recorders for estimating the location of animal sounds. These recording devices have numerous advantages over previously-available microphone array systems. Whereas previous systems were very costly, this system is relatively inexpensive (thousands of dollars instead of tens of thousands of dollars). Whereas previous systems were custom-manufactured, this system is available "off the shelf". Whereas most previous systems were cumbersome, either due to long stretches of cable or radio-transmission devices, this system is compact; the equipment we tested in this study fits in a small backpack. Whereas most previous systems required that microphones be

placed close together, limited by cable lengths or radio-transmission capabilities, this system is unlimited; the wireless, modular recording units can record with any distance of separation, and this can be adjusted based on the active space of the signals of the animal of interest.

In this methodological study, our goal was to evaluate whether this new technology provides a useful tool for field research. Previous research demonstrated that cable-based microphone arrays provide a compelling tool for spatial monitoring of animals (reviewed in Blumstein et al. 2011). We sought to determine whether a new, affordable, portable, wireless microphone array could provide a similarly compelling tool with a much greater ease of operation. We evaluate the accuracy of a four-recorder array for localizing pre-recorded sounds of birds, mammals, and frogs. We compare location accuracy in field versus forest habitats, across two densities of microphones (recorders separated by 25 versus 50 m), between sounds recorded inside versus outside the area bounded by the microphones, and across 25 different types of animal sounds.

## Materials and methods

We recorded animal sounds using an array made up of four stereo recorders arranged in a square with approximately 25 or 50 m on each side. Each recorder housed a pair of stereo microphones, so that the four recording units collected eight channels of acoustic information. The recorders were Wildlife Acoustics Song Meters (model: SM2-GPS; Wildlife Acoustics Inc., Concord, MA) with built-in omnidirectional microphones (frequency response: 20 – 20,000 Hz). These autonomous recorders are battery-operated stereo digital recorders capable of recording sounds at a variety of sampling frequencies and storing them to flash memory cards. With an additional Global Positioning System (GPS) option, the recorders use the signal from a GPS unit to synchronize each recorder's clock. These units are compact and portable. Each SM2 recorder is 18 x 18 x 7 cm, weighing approximately 2 kg, including 4

D-cell rechargeable nickel-metal-hydride batteries. Each detachable GPS unit is 9 x 9 x 4 cm, weighing approximately 500 grams. The units can accommodate four flash memory cards permitting long recordings. The units can be programmed to record at specific times of day, extending their service-free time in the field. The units are waterproof and capable of incorporating hydrophones (for aquatic research) and ultrasound-sensitive microphones (for chiropteran research). To our knowledge, these are the first such units available commercially that can serve as a wireless microphone array.

Whenever microphone arrays are used for estimating the position of sound sources based on time-of-arrival differences, the clocks of each recording device must be synchronized on a scale of milliseconds. Recording devices suffer from clock drift, where clocks gain or lose small amounts of time per minute of recording (Schmid et al. 2010). Although clock drift is usually imperceptible to humans, it results in a lack of synchronization which prevents sound localization based on time-of-arrival measurements. The system we used overcomes this obstacle using time synchronization from GPS satellites. Each recording unit resamples the sound file to ensure that it maintains synchronization with the satellite time signal.

Between 20 May and 30 June, 2011, we set up the microphone array at 12 different locations within the Ojibway Prairie Conservation Preserve (42°15.848'N, 83°4.472'W) and the University of Windsor Pelee Environmental Research Centre at Leamington (42°1.221'N, 82°30.778'W) in Essex County, Ontario, Canada. Four song meters were mounted on poles at a height of 1.5 m and placed in a square arrangement at each site (see supplement for photographs). We chose six sites that were open fields with no vegetation above 1m, and six locations that were mature forested sites with continuous hardwood canopy dominated by cottonwood (*Populus deltoides*), oak (*Quercus* spp.), and maple (*Acer* spp.). This allowed us to compare the accuracy of location estimates across both forest and field habitat types. At three forest and three field sites we arranged the four recorders in a square with approximately 25 m edges; at the other three forest and field sites we set up the recorders in a square

with approximately 50 m edges. This allowed us to compare the accuracy of location estimates across two densities of microphone. We collected recordings only on days with little or no wind and no rain; the addition of noise, such as wind or rain, is expected to diminish recording quality for any outdoor monitoring with this type of system.

At each of the 12 sites, we broadcast songs at two locations relative to the four recorders. One location was inside the area bounded by the recorders; the other location was outside the area bounded by the recorders. We determined the specific location for playback by generating random numbers (using iPod application “Random #”, E. van Zenn). For the loudspeaker location inside the array, we generated two random numbers between 0 and 50 (or 0 and 25 for the smaller arrays) to dictate the X and Y coordinates (in m) of the loudspeaker relative to the square created by the four recorders. For the loudspeaker located outside the array, we generated a random number between 1 and 4 to select one of the four edges of the array, and then two random numbers between 0 and 50 (or 0 and 25 for the smaller arrays) to dictate the X and Y coordinates (in m) of the loudspeaker beyond that edge.

Stimuli were broadcast from an omnidirectional loudspeaker (model: Anchor Audio Minivox PB-25, Torrance, CA, U.S.A; output: 15W; frequency response: 100 - 12,000 Hz). We mounted the speaker on a 1.5 m pole, facing upwards to minimize any influence of speaker directionality. Stimuli were stored as uncompressed WAVE files on a digital playback device (Apple iPod; Cupertino, CA, U.S.A.). We held the volume of playback constant at a sound pressure level of 95dB at a 1m horizontal distance from the upwards-oriented loudspeaker, measured with a digital sound level meter (model: RadioShack 33-2055; settings: slow response, C-weighting). We broadcast sounds at a high amplitude to ensure detection by the recorders. We used recording settings on the SM-2 Song Meters of 22050 Hz sampling frequency, 16-bit accuracy, with no file compression (WAVE format).



**Playback stimuli.** Stimuli for playback were chosen to represent a variety of different types of animal sounds (Table 1; spectrograms shown in the supplement). We selected sounds from the group of animals we have studied during previous investigations and additional species for which we had high-quality stimuli available, as well as two synthetic sounds for comparison. Together, these 25 sounds represent a spectrum of types of sounds, and thereby provide a robust test of the capabilities of this system. The stimuli are described in detail in the supplement, with spectrograms shown in Fig. S1. At each loudspeaker location, we broadcast the stimulus set three times to maximize the opportunity to record each type of sound without the influence of background noise; each stimulus set was approximately 5 minutes in length, so that the total recording time for the three repeats of each internal and external playback was approximately 15 minutes. We generated three independent stimulus sets, each using a different recording for each of the 25 types of sound. Each stimulus set was broadcast in four different arrays.

**Microphone and speaker position surveys.** In the field we set up the four recorders with approximate distances, using handheld GPS units (model: Garmin GPS 60CSx) to guide microphone placement. Microphone arrays require precise surveys of microphone positions because sound localization is based on the coordinates of the microphones combined with time-of-arrival differences of the recorded sounds at each microphone. We measured the exact positions of microphones and speakers using a survey-grade GPS (Ashtech ProMark 3; Santa Clara, CA). We used a four-unit system to conduct a static survey of the microphone and loudspeaker locations. We sampled the position of each recorder and loudspeaker for 20 to 40 minutes. Resulting measurements had a horizontal accuracy of  $1.12 \pm 0.20$  m (95% 2dRMS; mean  $\pm$  standard error; SE) with better accuracy in the field than forest sites (see supplement). We treated these position estimates as the true coordinates of the microphone positions. The coordinates from the Ashtech GPS revealed that our recorders were set up in squares

with average edge lengths of  $25.46 \pm 0.61$  m for our six “25 m” arrays, and average edge lengths of  $48.85 \pm 0.83$  m for our six “50 m” arrays (means  $\pm$  SE).

***Analysis of recordings.*** To analyze recordings we modified an existing procedure (Mennill et al. 2006) that we have used in prior studies involving cable-based microphone arrays (e.g. Fitzsimmons et al. 2008a; Mennill and Vehrencamp 2008; Lapierre et al. 2011). In the laboratory, we used Syrinx-PC sound analysis software (J. Burt, Seattle, WA) to combine field recordings from the four recorders into synchronized eight-channel sound files. We then used Syrinx-PC to visualize all eight channels and manually annotate the recordings, highlighting sections of the time and frequency domain that we wished to locate. We then used ArrayGUI software (J. Burt, Seattle, WA), a freely-available program written in MatLab (Mathworks Inc., Natick, MA), to calculate the location of the sound source. This software computes cross-correlation functions for annotated sounds and searches for the best location estimate; it uses an optimization approach involving the Euclidean distances between the sound source and the coordinates of the eight microphones. Full details are given in Mennill et al. (2006).

We distinguished “reliable” from “unreliable” location estimates based on two indicators that ArrayGUI produces for every annotated sound. (1) ArrayGUI generates a quality index for each location, a positive number that estimates the error of the location. (2) ArrayGUI generates a map of the estimated location surrounded by a probability cloud of alternative, lower-probability location estimates. We considered a location “reliable” when the quality index was 0.7 or higher, and the probability cloud had a small (<5m diameter) circular distribution; we considered a location “unreliable” when the quality index was less than 0.7 or the probability cloud was large (>5m diameter) or non-circular (see examples in supplement). Previous experience has taught us that location accuracy is better when short sections of recordings (i.e. less than 1.0 sec) are selected for location. Therefore we annotated multiple, short sections of each type of sound (see below), each 0.5 to 1.0 sec in length

(average length of annotation:  $0.77 \pm 0.01$  s). Given that our goal was to evaluate whether this system can produce reliable estimates of location, we focused only on reliable position estimates.

**Sample size.** We broadcast 25 sound types at 2 different locations (inside and outside the area bounded by the recorders) at each of 12 different sites, resulting in a total of 600 unique sound type/location combinations. For each sound type, we attempted to locate 12 annotations inside the array and 12 annotations of the sound outside the array (a total of 7,200 attempted annotations). We rejected sounds where there was substantial overlapping background sounds (car traffic passing on nearby roads, airplanes flying overhead, and live birds vocalizing near the recording apparatus), resulting in an average of  $10.2 \pm 0.07$  annotations per species per loudspeaker position (a total of 6,085 annotated sounds; i.e. 15.5% of annotations were excluded due to overlapping background sounds). Approximately half of the remaining annotations produced unreliable location estimates and were removed from the dataset (i.e. 57.2% of the remaining annotations were excluded due to ArrayGUI indicating unreliable location estimates). We were left with  $5.4 \pm 0.2$  annotations per sound type per loudspeaker position with reliable location estimates (a total of 1,964 reliable located sounds; 362 of 600 sound type/location combinations, 60.3%, had at least one reliable location estimate). We then calculated the average distance between the estimated locations and the GPS position of the loudspeaker for each type of sound. Our final dataset consists of 362 averaged position estimates. This process of calculating multiple locations per sound, and then calculating an average position for that sound, would also be effective for ensuring accurate location of animals in the field.

**Statistical methods.** For a given playback stimulus, we defined location accuracy as the average absolute difference between the reliable positions that were estimated by ArrayGUI and the position that was determined by the survey-grade GPS system (following McGregor et al. 1997). We then used a linear mixed-effects model to determine which factors affected location accuracy. Habitat type (field versus forest), microphone density (25 m versus 50 m edges), speaker location (inside versus outside),

and all two-way and three-way interactions were included as fixed factors in the model. Array location (1 to 12) was included as a subject variable with random effects to account for non-independence among observations. We estimated fixed effects using the restricted maximum likelihood method and modeled the subject effect by assuming a variance components covariance structure. Residuals were not normally distributed, but were corrected by applying a log-10 transformation to localization accuracy. All other model assumptions were satisfied. We evaluate the probability of generating reliable location estimates among the playback sites using Wilcoxon sign-rank tests to compare habitat types (forest versus field) and Mann-Whitney *U*-tests to compare microphone densities (25 versus 50 m) and speaker locations (internal versus external). We used the Hodges-Lehmann procedure to estimate the median difference between treatments and to calculate the corresponding 95% confidence intervals (Hodges and Lehmann 1963). We considered results to be statistically significant when  $p \leq 0.05$ , and to be statistical trends when  $0.05 \leq p \leq 0.1$ . All statistical analyses were conducted in JMP (v. 8.0; SAS Institute, Cary, NC) or PASW (v. 18.0; IBM, Armonk, NY). All values are reported as means  $\pm$  SE. Results of our linear mixed-effects model are presented as the estimated marginal means  $\pm$  SE of the model.

## Results

A portable wireless microphone array, comprising four stereo digital recorders, produced accurate location estimates of loudspeakers broadcasting different types of bird, mammal, and frog sounds. The system had an overall location accuracy of  $1.87 \pm 0.13$  m for sounds broadcast inside the array (average across all reliable internal location estimates at 12 different locations). The system had an overall location accuracy of  $10.22 \pm 1.64$  m for sounds broadcast outside the array (average across all reliable external location estimates at 12 different locations).

We found significant variation in location accuracy using a linear mixed-effects model. Location accuracy was not significantly different in open field sites compared to closed forested sites, although there was a non-significant trend for better accuracy at field sites (Fig. 1a;  $F_{1,8} = 4.4$ ,  $p = 0.07$ ). Location accuracy was significantly better when the loudspeaker broadcasting the sound was located within the area bounded by the four recorders versus outside the area bounded by the four recorders (Fig. 1b;  $F_{1,352} = 114.8$ ,  $p < 0.0001$ ). Location accuracy was significantly better when microphones were positioned closer together rather than farther apart (i.e. arrays arranged in a 25 m square versus a 50 m square; Fig. 1c;  $F_{1,8} = 9.1$ ,  $p = 0.02$ ). The model also revealed an interaction between habitat type and the loudspeaker location ( $F_{1,352} = 18.3$ ,  $p < 0.0001$ ); the location accuracy for loudspeakers outside the area bounded by the arrays were similarly poor for field and forested sites, but the location accuracy inside the area bounded by the arrays at field sites was better than the accuracy inside the area bounded by the arrays at forested sites (Fig. 2). All other two-way interactions and the single three-way interaction were non-significant (all  $F < 2.3$ , all  $p > 0.17$ ).

The frequency with which we identified reliable location estimates varied between internal versus external loudspeaker positions and between field versus forest sites. On average,  $48.8 \pm 5.8$  % of estimated locations were identified as reliable when the loudspeaker was inside the area bounded by the array, significantly more than the  $16.3 \pm 5.3$  % identified as reliable when the loudspeaker was outside the area bounded by the array (Wilcoxon sign-rank:  $Z = 36$ ,  $p = 0.002$ ,  $n = 12$ ; median difference: 34.5 %; confidence interval: 20.1 – 45.9 %). A significantly greater proportion of sounds were identified as reliable at field sites ( $64.6 \pm 4.4$  %) compared to forest sites ( $32.9 \pm 5.3$  %; Mann-Whitney:  $U = 2.8$ ,  $p = 0.005$ ,  $n = 12$ ; median difference: 29.1 %; confidence interval: 15.7 – 48.4 %). An equivalent proportion of sounds were identified as reliable when recorders were arranged in a square with 25m edges ( $47.4 \pm 9.9$  %) compared to 50 m edges ( $50.2 \pm 7.1$  %; Mann-Whitney:  $U = 0.0$ ,  $p = 1.0$ ,  $n = 12$ ; median difference: 0.3 %; confidence interval: -30.3 – 24.1 %).

The 25 types of sounds showed variation in location accuracy as well as variation in the frequency with which the analysis software generated reliable location estimates (Table 1). Our sample size precludes statistical analyses of these data, but we present them for informational purposes to help guide other researchers. The sonations of woodpeckers produced remarkably few reliable location estimates (sound types 17, 18; Table 1). Tonal sounds with little frequency modulation tended to show poorer location accuracy, fewer reliable location estimates, or both (e.g. sound types 2, 3, 5, 12, 20; Table 1). Sounds consisting of rapidly-repeated notes at a high pitch (e.g. sound types 8, 19) presented similar difficulties, whereas sounds consisting of rapidly-repeated notes at a low pitch showed better location accuracy with many reliable location estimates (e.g. sound types 16, 23, Table 1). Although the different types of sounds varied in location accuracy, all sounds produced sufficiently accurate and reliable data to be useful in studies of free-living animals, with the exception of woodpecker drumming sonations and pure tone sine waves (Table 1).

## Discussion

Our field test of a portable wireless microphone array demonstrates that this new technology can provide accurate estimates of the location of a sound source based on time-of-arrival delays at four autonomous recorders. In a recent review paper on microphone array technology, Blumstein et al. (2011) concluded that “acoustic recording and processing technology has the potential to transform the fields of ecology, behaviour, and conservation biology,” but that “additional work is required to achieve this potential.” As with previous microphone array systems, the system we describe here produces accurate position estimates of free-living animals. The system we describe, however, represents a major advance towards microphone arrays becoming a widespread and field-ready technology; it is a commercially available, inexpensive, portable wireless microphone array that makes acoustic

monitoring available to any behavioural researcher, ecologist, or conservation biologist. Our findings firmly establish that this technology can provide accurate and reliable estimates of the position of a variety of different types of bird, mammal, and frog sounds. Just as radiotelemetry has shed light on animal behaviour and ecology since its development in the 1960's and 1970's (Robert-Courdert and Wilson 2005), we anticipate that this easy-to-use acoustic monitoring system will provide a wealth of new insights for field researchers.

Our findings show that the location accuracy of sounds varied with several factors. First, location accuracy varied with the density of the microphones used to record sounds. We generated a similar number of reliable location estimates for sounds broadcast within arrays set up in a square with 25 m versus 50 m edges, but the smaller arrays produced location estimates with significantly higher accuracy than the larger arrays. Recognizing that location accuracy improves as a function of microphone density, ecologists and behavioural biologists can select an ideal density of microphone arrays relative to their desired accuracy, trading off the size of the total area to be monitored against the desired accuracy, or increasing the number of microphones to increase the coverage area. For example, cable-based array studies by Patricelli and Krakauer (2010) used 24 microphones close together in order to distinguish fine scale movements of multiple male Greater Sage Grouse (*Centrocercus urophasianus*) concurrently calling on the same lek. In contrast, cable-based array studies by Fitzsimmons et al. (2008a) and Foote et al. (2008) placed 16 microphones far apart to monitor territorial dynamics in breeding neighbourhoods of male Black-capped Chickadees. Of course, array density is limited by the active space of animal signals, because triangulation is only possible when the sound is detected at three or more channels. Since we were testing the capabilities of this new system to act as a wireless microphone array, we broadcast sounds at high amplitude to ensure they were detected by the recorders. Future studies should adjust array size according to the active space of the signals under study.

Second, location accuracy varied with the relative position of the sound source. When we broadcast sounds within the area bounded by the four recorders, we generated more reliable location estimates and these estimates had better accuracy compared to sounds played outside the area bounded by the four recorders. This result is expected theoretically and matches previous findings. In the most rigorous test of this idea to date, McGregor et al. (1997) broadcast sounds at five 15m increments stretching from the centre of a four-microphone cable-based array (microphones arranged in a square with 40m edges). They showed that location error increased dramatically with increasing distance outside of the area bounded by the microphones. The same pattern should hold true with a cable-based or a wireless microphone array. McGregor et al.'s (1997) findings, together with our findings, underscore the idea that terrestrial microphone arrays work most effectively for monitoring animals within the area bounded by the microphones.

Third, location accuracy varied between forest and field habitats, although not significantly. There was a non-significant tendency for more accurate location estimates in an open field compared to a closed forest. A significant two-way interaction effect revealed that habitat differences were related to the position of sound sources in forest and field habitats. Location accuracy was similarly poor for sound sources outside of the arrays in both forest and field habitats; but location accuracy was better for sound sources within the array in field habitats compared to forest habitats. There are two possible explanations for this non-significant pattern. First, our GPS survey accuracy was higher in the field sites versus forest sites (see supplement), which likely diminished location accuracy in the forest. Second, the scattering, reverberation, and sound attenuation in forests may have diminished location accuracy. Previous work also supports this position; McGregor et al. (1997) showed that location error was consistently higher in paired comparisons of sounds played back in European woodlands compared to meadows.



Finally, location accuracy varied with the type of sound. Of the 25 types of sounds that we broadcast in each microphone array, we found accuracies that ranged from 0.1 to 6.0 meters inside the area bounded by the recorders. We also found substantial variation in the proportion of annotated sounds that could be reliably localized with our software, ranging from 1% to 93% (table 1). The sounds with the highest location accuracy represented a broad spectrum of types of sounds, including frequency modulated sine waves, Carolina Wren songs, Long-tailed Manakin duets, Barred Antshrike calls, Grey Treefrog calls, and Yellow Toad calls. Three sounds were very difficult to locate, with less than 20% of the sounds producing a reliable location estimate: the drumming sonations of two woodpecker species and the unmodulated synthetic sine wave. These sounds appear to be too acoustically simple to triangulate based on time-of-arrival differences. McGregor et al. (1997) compared location accuracy across four bird vocalizations and found statistically similar location accuracies across the four species, three of which were frequency-modulated vocalizations like many of the bird sounds we tested here, and one of which was a pulsating call similar to the frog sounds we tested here.

The accuracy we achieved with a wireless microphone array falls in line with the accuracy of previous cable-based microphone systems. For example, Mennill et al. (2006) achieved an accuracy of  $2.8 \pm 0.3\text{m}$ , monitoring the large territories of Rufous-and-white Wrens in a Neotropical forest with an 8-microphone cable array with inter-microphone distances of 75m. Bower and Clark (2005) achieved an accuracy of  $0.8 \pm 0.3\text{ m}$  for birds near the centre of their array, monitoring the small territories of Song Sparrows in a field using a 4-microphone cable array with inter-microphone distances of 40 m. Patricelli and Krakauer (2010) achieved an accuracy of  $0.4 \pm 0.2\text{ m}$  for sounds near the centre of their array, monitoring the open habitat of a Greater Sage Grouse lek with a 24-microphone cable array with small inter-microphone distances of  $15.8 \pm 0.6\text{ m}$  (G. Patricelli and A. Krakauer, pers. comm.).

Several sources of error may have contributed to the accuracy measurements we report here. Most importantly, our GPS measurements of microphone positions had an error of 1.12 m, likely

contributing a large fraction of the error in our overall position accuracy of 1.86 m. There are several methods that can be used to survey microphone positions, some of which may lead to lower microphone measurement error, and consequently higher localization accuracy with microphone array recordings. Direct surveys with line-of-sight surveying equipment or measuring tape may be ideal in some situations (e.g. densely-concentrated arrays in open fields) but may be impossible in other situations (e.g. sparser arrays in dense forests). Sampling microphone positions with a survey-grade GPS for extended periods may lead to higher microphone position estimation; we sampled microphone positions for only 20-40 minutes. An intriguing possibility for inexpensive surveys of microphone positions involves handheld GPS units; although any one point has low accuracy, handheld GPS units could be left collecting data at a fixed position for long periods (hours to days) to calculate a more precise average position over a long sampling period. We tested this approach (see supplement) and found that this approach still produces reasonable location estimates, but with lower accuracy than a survey-grade GPS. New techniques such as acoustic self-surveys (see Collier et al. 2010) present new, alternative survey techniques. The remaining error in our study, beyond that due to microphone position estimates, probably arose due to attenuation and reverberation as sounds transmitted from the loudspeaker to the microphones, subtle variations in topography (the software we used assumes that sounds travel in a two-dimensional plane), or inaccuracies in the position estimation software.

When will microphone arrays provide a useful monitoring tool for studies of animal ecology, evolution, and behaviour? Microphone arrays will be most useful for studying highly acoustic animals, such as animals that produce loud territorial signals, frequent mate attraction signals, or contact calls and alarm calls. To date, microphone arrays have been used for many purposes (reviewed in Blumstein et al. 2011), including monitoring patterns of animal territoriality (e.g. Kirschel et al. 2011, Osmun and Mennill 2011), studying network-based signalling behaviours (e.g. Foote et al. 2008), observing the movements of countersinging animals (e.g. Fitzsimmons et al. 2008b), testing the directionality of

animal signals (Patricelli et al. 2007), or surveying large areas to assess the presence of rare animals (e.g. Hill et al. 2006; Baldo and Mennill 2011). Microphone arrays can provide insight into behaviours that could not be studied otherwise, such as behaviour evident in environments where visual information is limited, like nocturnal animals or animals inhabiting dense vegetation (Blumstein et al. 2011). The system we tested here is especially useful given its relative ease of operation. Previously, cable-based arrays required tremendous effort in the field. For example, the eight-microphone cable array used by Mennill et al. (2006) took a team of four researchers approximately four hours to set up and take down; the sixteen-channel cable array used by Foote et al. (2008) and Lapierre et al. (2011) took a team of eight researchers approximately five hours to set up and take down (see supplement). In contrast, four people were able to set up and take down the four-recorder array we used here six times in a single day. Additionally, because the digital recorders in this system are programmable, they can be set to turn on and off at specific times, minimizing the necessity for human input (and human influence on the recorded animals) after the initial setup.

In some situations, microphone arrays are unlikely to provide a useful monitoring tool. Acoustic monitoring requires that the study animals produce sound. Therefore, animals that are quiet, or animal behaviours that occur in silence, cannot be monitored with microphone arrays. For tracking individuals, sounds must have individually distinctive acoustic signatures, a feature that appears to be quite common across diverse animals (Mennill 2011). For sounds that are not individually distinctive, other research technologies can be combined with microphone array recordings, such as video recordings time-synchronized with microphone array recordings (e.g. Patricelli et al. 2007). Excessive background noise serves as an impediment to microphone arrays whenever this noise overlaps both the time and frequency domains of the signals used to calculate the animal's location. Animals that move over very large areas will be expensive to monitor with a microphone array, because many microphones will be required to monitor their movement activities and behaviours. Nevertheless, microphone arrays have

405 been used to monitor large breeding territories of birds (e.g. Mennill and Vehrencamp 2008) or entire  
406 neighbourhoods of breeding birds (e.g. Fitzsimmons et al. 2008a). In addition, our analyses reveal that  
407 certain types of sounds, including the extremely simple drumming sonations of woodpeckers and pure  
408 tone sine waves, are less effectively monitored than other types of sounds. Consequently, pilot studies  
409 with careful attention to the active space of the signals being studied, possibly using a playback  
410 approach as used here, will be valuable in future investigations.

411 In conclusion, our field test of a new, portable, wireless microphone array with integrated GPS  
412 time synchronization reveals that this system provides accurate measurements of the position of a  
413 sound source, supporting the idea that this is a useful new research technology for the spatial  
414 monitoring of animals. Microphone arrays have many advantages over other tracking technologies, and  
415 the advent of this user-friendly system stands to enhance ecological and behavioural studies for a broad  
416 diversity of researchers.

417  
418 **Acknowledgements** We thank Somboon Kamtaeja for valuable field assistance. We thank Ojibway  
419 Prairie Conservation Preserve and the University of Windsor's Pelee Environmental Research Centre for  
420 logistical support. We are indebted to the excellent programming abilities of John Burt, who developed  
421 both Syrinx-PC and ArrayGUI software. We thank the Natural Sciences and Engineering Research Council  
422 of Canada (NSERC) for providing equipment grants for the recording devices and survey-grade GPS, as  
423 well as support through the Undergraduate Summer Research Award program, the Post-Doctoral  
424 Fellowship program, and Discovery Grants program. This research was also supported by grants from  
425 the Canada Foundation for Innovation and the Government of Ontario to DJM.

**Conflict of interest statement** The authors declare that they have no conflict of interest, financial or otherwise, and that they have no relationship with the company Wildlife Acoustics beyond having purchased their equipment for bioacoustic research.

## References

- Baldo, S., & Mennill, D.J. (2011) Vocal behavior of Great Curassows, a vulnerable Neotropical bird. *Journal of Field Ornithology* **82**, 249-258.
- Blumstein, D.T., Mennill, D.J., Clemins, P., Girod, L., Yao, K., Patricelli, G., Deppe, J.L., Krakauer, A.H., Clark, C., Cortopassi, K.A., Hanser, S.F., McCowan, B., Ali, A.M., & Kirschel, A.N.G. (2011) Acoustic monitoring in terrestrial environments using microphone arrays: Applications, technological considerations and prospectus. *Journal of Applied Ecology* **48**, 758-767.
- Bower, J.L., & Clark, C.W. (2005) A field test of the accuracy of a passive acoustic location system. *Bioacoustics* **15**, 1-14.
- Bradbury, J.W., Vehrencamp, S.L. (2011) Animal Communication. Sunderland, Massachusetts.
- Burt, J.M., & Vehrencamp, S.L. (2005) Dawn chorus as an interactive communication network. In: McGregor PK (ed) Animal Communication Networks, Cambridge University Press, Cambridge, pp 320-343.
- Collier, T.C., Kirschel, A.N., & Taylor, C E (2010) Acoustic localization of antbirds in a Mexican rainforest using a wireless sensor network. *Journal of the Acoustical Society of America* **128**, 182-189.
- Jones, D.L., & Ratham, R. (2009) Blind location and separation of callers in a natural chorus using a microphone array. *Journal of the Acoustical Society of America* **126**, 895-910.
- Fitzsimmons, L.P., Foote, J.R., Ratcliffe, L.M., & Mennill, D.J. (2008a) Eavesdropping and communication networks revealed through stereo playback and an Acoustic Location System. *Behavioral Ecology* **19**, 824-829.
- Fitzsimmons, L.P., Foote, J.R., Ratcliffe, L.M., & Mennill, D.J. (2008b) Frequency matching, overlapping, and movement behaviour in diurnal countersinging interactions of black-capped chickadees. *Animal Behaviour* **75**, 1913-1920
- Foote, J.R., Fitzsimmons, L.P., Mennill, D.J., & Ratcliffe, L.M. (2008) Male chickadees match neighbours interactively at dawn: support for the social dynamics hypothesis. *Behavioral Ecology* **19**, 1192-1199.
- Foote, J.R., Fitzsimmons, L.P., Mennill, D.J., & Ratcliffe, L.M. (2011) Male black-capped chickadees begin dawn chorusing earlier in response to simulated territorial insertions. *Animal Behaviour* **81**, 871-877.
- Hill, G.E., Mennill, D.J., Rolek, B.W., Hicks, T.L., & Swiston, K.A. (2006) Evidence suggesting that ivory-billed woodpeckers exist in Florida. *Avian Conservation and Ecology (ACE-ECO)* **1**, 2.
- Hodges, J. L. Jr., & Lehmann, E. L. (1963) Estimates of location based on rank tests. *The Annals of Mathematical Statistics* **34**, 598-611.
- Kirschel, A.N.G., Cody, M.L., Harlow, Z.T., Promponas, V.J., Vallejo, E.E., & Taylor, C.E. (2011) Territorial dynamics of Mexican Ant-thrushes *Formicarius moniliger* revealed by individual recognition of their songs. *Ibis* **153**, 255-268.

Lapierre, J.M., Mennill, D.J., & MacDougall-Shackleton, E.A. (2011) Spatial and age-related variation in use of locally common song elements in dawn singing of song sparrows *Melospiza melodia*; old males sing the hits. *Behavioral Ecology and Sociobiology* **65**, 2149-2160.

McGregor, P.K. (2005) Animal Communication Networks. Cambridge University Press, Cambridge.

McGregor, P.K., Dabelsteen, T., Clark, C.W., Bower, J.L., Tavares, J.P., Holland, J. (1997) Accuracy of a passive acoustic location system: empirical studies in terrestrial habitats. *Ethology Ecology and Evolution* **9**, 269-286.

Mennill, D.J. (2011) Individual distinctiveness in avian vocalizations and the spatial monitoring of behaviour. *Ibis* **153**, 235-238.

Mennill, D.J., & Vehrencamp, S.L. (2008) Context-dependent functions of avian duets revealed through microphone array recordings and multi-speaker playback. *Current Biology* **18**, 1314-1319.

Mennill, D.J., Burt, J.M., Fristrup, K.M., & Vehrencamp, S.L. (2006) Accuracy of an acoustic location system for monitoring the position of duetting tropical songbirds. *Journal of the Acoustical Society of America* **119**, 2832-2839.

Osmun, A.E., & Mennill, D.J. (2011) Acoustic monitoring reveals congruent patterns of territorial singing behaviour in male and female tropical wrens. *Ethology* **117**, 385-394.

Paticelli, G.L., & Krakauer, A.H. (2010) Tactical allocation of effort among multiple signals in sage grouse: an experiment with a robotic female. *Behavioral Ecology* **21**, 97-106.

Patricelli, G.L., Dantzker, M.S., & Bradbury, J.W. (2007) Differences in acoustic directionality among vocalizations of the male red-winged blackbird (*Agelaius phoeniceus*) are related to function in communication. *Behavioral Ecology and Sociobiology* **61**, 1099-1110.

Ropert-Coudert, Y., Wilson, R.P. (2005) Trends and perspectives in animal-attached remote sensing. *Frontiers in Ecology and Evolution* **3**, 437-444.

Schmid, T., Shea, R., Charbiwala, Z., Friedman, J., Srivastava, M.B., & Young, H.C. (2010) On the Interaction of Clocks, Power, and Synchronization in Duty-Cycled Embedded Sensor Nodes. *ACM Transactions on Sensor Networks* **7**:24(1)-24(19).

**Table 1. The location accuracy and percent of reliable location estimates for 25 types of sounds broadcast and re-recorded with a portable, wireless acoustic location system.**


Type of Sound <sup>1</sup>	Location accuracy (in m) <sup>2</sup>	Percent reliable locations <sup>3</sup>
1. Sine Wave – Modulated	1.0±0.3	93%
2. Sine Wave – Tone	1.6±0.5	19%
3. Black-capped Chickadee ( <i>Poecile atricapillus</i> ) - Song	3.4±1.1	33%
4. Black-capped Chickadee - Call	0.8±0.2	56%
5. White-throated Sparrow ( <i>Zonotrichia albicollis</i> ) - Song	2.4±0.7	37%
6. Eastern Phoebe ( <i>Sayornis phoebe</i> ) - Song	2.7±1.0	41%
7. Tree Swallow ( <i>Tachycineta bicolor</i> ) - Song	1.5±0.3	58%
8. Chipping Sparrow ( <i>Spizella passerina</i> ) - Song	3.1±0.9	48%
9. House Wren ( <i>Troglodytes aedon</i> ) - Song	2.4±0.7	39%
10. Song Sparrow ( <i>Melospiza melodia</i> ) - Song	2.1±0.5	49%
11. Carolina Wren ( <i>Thryothorus ludovicianus</i> ) - Song	1.7±0.4	78%
12. Rufous-and-white Wren ( <i>Thryothorus rufalbus</i> ) - Song	1.1±0.2	37%
13. Rufous-naped Wren ( <i>Campylorhynchus rufinucha</i> ) - Song	0.8±0.2	58%
14. Long-tailed Manakin ( <i>Chiroxiphia linearis</i> ) - Call	1.1±0.3	83%
15. Royal Flycatcher ( <i>Onychorhynchus mexicanus</i> ) - Call	1.9±0.5	49%
16. Barred Antshrike ( <i>Thamnophilus doliatus</i> ) - Call	1.1±0.2	67%
17. Pale-billed Woodpecker ( <i>Campephilus guatemalensis</i> ) - Drum	0.1±0.0	1%
18. Pileated Woodpecker ( <i>Dryocopus pileatus</i> ) - Drum	6.0±4.5	4%
19. Eastern Red Squirrel ( <i>Tamiasciurus hudsonicus</i> ) - Call	2.5±0.8	37%
20. Richardson's Ground Squirrel ( <i>Urocitellus richardsonii</i> ) - Whistle	3.3±1.1	38%
21. Richardson's Ground Squirrel - Chirp	2.4±1.2	46%
22. Spider Monkey ( <i>Ateles geoffroyi</i> ) - Whinny	2.3±0.9	45%
23. Grey Treefrog ( <i>Hyla versicolor</i> ) - Call	1.4±0.4	73%
24. Spring Peeper ( <i>Pseudacris crucifer</i> ) - Call	1.9±0.4	58%
25. Yellow Toad ( <i>Bufo luetkenii</i> ) - Call	1.3±0.3	68%

<sup>1</sup> Sound spectrograms for the 25 types of sounds are shown in the supplement in Figure S1.


<sup>2</sup> Location accuracy is expressed as the mean (± SE) distance between the array-estimated location of the sound source and the GPS coordinates of the loudspeaker (in meters).

<sup>3</sup> Percent of reliable locations shows the percent of all sounds that were analyzed with the localization software that produced a high quality estimated location.



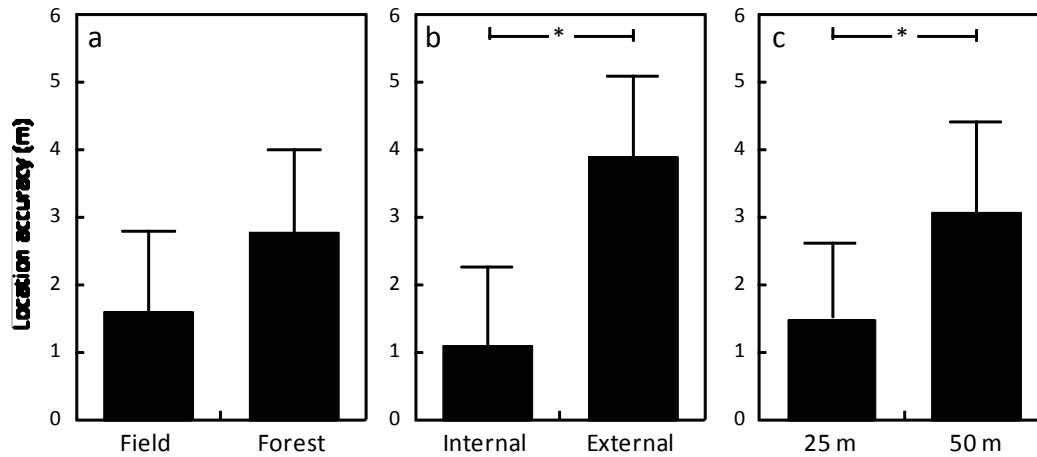

**Fig. 1.** Location accuracy of a portable wireless microphone array for estimating the position of a loudspeaker broadcasting sounds of birds, mammals, and frogs. (a) Location accuracy tended to be better in open field habitat versus closed forest habitat. (b) Location accuracy was significantly better when sounds were broadcast from loudspeakers inside versus outside the area bounded by the recorders. (c) Location accuracy was significantly better when the recorders were separated by smaller distances (25m) versus larger distances (50m). Means  $\pm$  SE shown are reverse log(10) transformed from the estimated marginal means of our linear mixed model. Asterisks indicate statistically significant differences ( $p \leq 0.05$ ).

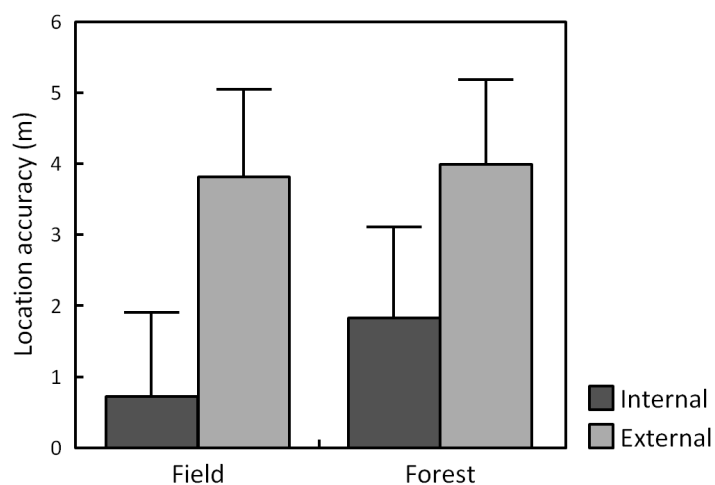

**Fig. 2** Location accuracy showed a two-way interaction effect for forest versus field habitats and internal versus external broadcast sites. Sounds played inside a microphone array in an open field habitat had better accuracy than sounds played inside an array in a closed forest habitat; sounds played outside of arrays in both habitats were similarly poor. Means  $\pm$  SE shown are reverse  $\log_{10}$  transformed from the estimated marginal means of our linear mixed model.

## ONLINE SUPPLEMENT

# Field test of an affordable, portable, wireless microphone array for spatial monitoring of animal ecology and behaviour

Daniel J. Mennill<sup>1\*</sup>, Matthew Battiston<sup>1</sup>, David R. Wilson<sup>1</sup>, Jennifer R. Foote<sup>2</sup>, and Stéphanie M. Doucet<sup>1</sup>

<sup>1</sup> Department of Biological Sciences, University of Windsor, Windsor, Ontario N9B3P4, Canada

<sup>2</sup> Department of Biology, Algoma University, Sault Ste. Marie, Ontario P6A2G4, Canada

\* Author for correspondence. Email: dmennill@uwindsor.ca

### Contents of the online supplement

Details of playback stimuli .....	2
Notes on the ease of use of the microphone array .....	2
Note concerning the distance between microphones.....	3
Note concerning the number of accurate locations .....	3
Comparison of GPS accuracy in the forest versus field .....	3
Notes on the three types of GPS data used in this study .....	4
Comparison of location accuracy using handheld GPS surveys of microphone positions.....	4
Links to hardware and software used in this study .....	5
References for online supplement .....	6
Figure S1. Sound spectrograms showing examples of the sounds played back and recorded with a portable, wireless acoustic location system.....	7
Figure S2. Examples of the graphical output of ArrayGUI triangulation software, showing both reliable and unreliable location estimates. ....	8
Figure S3. Photographs of GPS-enabled Song Meters used as a wireless microphone array. ....	9
Figure S4. Maps of loudspeaker and microphone positions for the twelve deployments of the wireless microphone array. .	10

### Details of playback stimuli

Each broadcast included the following 25 types of sounds (depicted in Fig. S1): (1) a frequency-modulated sine wave (a tone rising from 1 to 5 kHz over 0.5 sec); (2) an unmodulated pure-tone sine wave (a 2 kHz tone lasting 0.25 sec); (3) the tonal song of the Black-capped Chickadee (*Poecile atricapillus*); (4) the harmonic-rich *chick-a-dee* call of the Black-capped Chickadee; (5) the tonal song of the White-throated Sparrow (*Zonotrichia albicollis*); (6) the song of the Eastern Phoebe (*Sayornis phoebe*); (7) the song of the Tree Swallow (*Tachycineta bicolor*); (8) the trilled song of the Chipping Sparrow (*Spizella passerina*); (9) the song of the House Wren (*Troglodytes aedon*); (10) the song of the Song Sparrow (*Melospiza melodia*); (11) the repeated-note song of the Carolina Wren (*Thryothorus ludovicianus*); (12) the tonal song of the Rufous-and-white Wren (*Thryothorus rufalbus*); (13) the male-female duet song of the Rufous-naped Wren (*Campylorhynchus rufinucha*); (14) the tonal male-male duet song of the Long-tailed Manakin (*Chiroxiphia linearis*); (15) the *keeyup* call of the Royal Flycatcher (*Onychorhynchus mexicanus*); (16) the trilled song of the Barred Antshrike (*Thamnophilus doliatus*); (17) the double knock sonation of the Pale-billed Woodpecker (*Campephilus guatemalensis*); (18) the repeated element drumming sonation of the Pileated Woodpecker (*Dryocopus pileatus*); (19) the call of the American Red Squirrel (*Tamiasciurus hudsonicus*); (20) the whistle call of the Richardson's Ground Squirrel (*Urocitellus richardsonii*); (21) the *chirp* call of the Richardson's Ground Squirrel; (22) the *whinny* call of a spider monkey (*Ateles geoffroyi*); (23) the repeated-note call of the Grey Tree Frog (*Hyla versicolor*); (24) the *peep* call of the Spring Peeper (*Pseudacris crucifer*); and (25) the pulsating call of the Yellow Toad (*Bufo luetkenii*).

We created stimuli 1 and 2 using Audition software (Adobe Systems Inc., San Jose CA). Stimuli 3, 6, 9, 10, and 12-25 were from our personal recordings collected in the field during previous investigations. Stimuli 4, 5, 7, 8, 11 were taken from the commercial CDs "Stokes Field Guide to the Bird Songs of Eastern North America" and "Peterson Field Guide to the Birds of Eastern North America". A stimulus set used in this analysis is attached as a WAV file for download (stimuli 4, 5, 7, 8, and 11 are not included in this WAV file to avoid copyright infringement).

### Notes on the ease of use of the microphone array

Previous cable-based microphone array systems have provided insight in the ecology and behaviour of wild animals, but are often logistically challenging to set up. For example, our research group has used cable-based microphone arrays to study vocal duetting in Rufous-and-white Wrens in a tropical forest habitat (an 8-microphone cable-based array; see Mennill et al. 2006; Mennill & Vehrencamp 2008), to study behavioural ecology of Black-capped Chickadees living in a temperate forest habitat (a 16-microphone cable-based array; see Fitzsimmons et al. 2008a,b; Foote et al. 2008a,b), and to study singing behaviour in Song Sparrows living in a temperate field habitat (a 16-microphone cable-based array; see Lapierre et al. 2011). The 8-microphone cable array required a team of four researchers to efficiently move the array between two nearby recording locations, with a time commitment of approximately 1.5 hours to take down the array and 2.5 hours to set up the array (i.e. 16 person-hours to move an 8-microphone array). The two 16-microphone cable arrays took a team of eight researchers to efficiently move the array, with a time commitment of approximately 2.0 hours to take down the array and 3.0 hours to set up the array (i.e. 40 person-hours to move a 16-microphone array). The majority of this time involved stretching cable between the centrally-located laptop computer and each of the microphones, with additional time to attach the microphones to trees (see Mennill et al. 2006) and test that each microphone was properly connected by collecting test recordings. The equipment required to operate these cable-based arrays filled the trunk of our research vehicle (not including the GPS equipment for surveying microphones). In addition, the equipment for these cable-based systems was very heavy, owing mostly to the weight of kilometres of copper cable.

The system described here was much easier to operate. Four people quickly moved the 4-recorder array between two nearby recording locations; in a single day we set up the array in six different configurations. It took us approximately 10 minutes to take down the array and 10 minutes to set up the array (i.e. 1.3 person-hours for moving the 4-recorder, 8-microphone array). The majority of this time involved walking between the recording locations. The required equipment for this system is compact and lightweight; the entire system fit in a backpack that could be carried by one person (not including the GPS equipment for surveying recorder locations).

### **Note concerning the distance between microphones**

We recorded sounds with the stereo microphones attached directly to the side of the Song Meters (see Fig. S3a). Consequently, the microphones were separated by short distances (ca. 29 cm). Wildlife Acoustics now sells microphone cable extensions in 1, 3, 10, and 50m lengths, so that the microphones can be separated from the recorders by these distances. An alternative approach – which we have not tested – would involve attaching one or both microphones to the Song Meter with a cable extension, thereby increasing the distance between the two microphones. This would enhance the microphone coverage of the study site and possibly improve triangulation capabilities.

### **Note concerning the number of accurate locations**

In this first field test of this new technology, we rejected many locations because they were deemed unreliable by ArrayGUI software. We targeted 7,200 annotated sounds (12 examples inside and 12 examples outside of the array for each of the 25 types of sounds in each of the 12 arrays), and we succeeded in producing annotations for 6,085 sounds after discounting sounds that were badly overlapped by background noise (anthropogenic noise from cars and airplanes; biotic sounds from live animals at the 12 recording sites). We used ArrayGUI to triangulate the position of these 6,085 annotated sounds. ArrayGUI provided location estimates deemed to be reliable for 1,964 of these 6,085 annotated sounds (32.3%). We categorized locations as “reliable” when ArrayGUI generated a quality index of 0.7 or higher, and when the probability cloud showing the position estimate on a map of the microphone locations had a small (<5m diameter) circular distribution. We provide examples of four reliable and four unreliable position estimates in Fig. S2. We calculated an average distance between the estimated locations and the GPS position of the loudspeaker for each type of sound, producing a final dataset of 362 averaged position estimates (i.e. 60.3% of the 600 sound type/location combinations had at least one reliable location estimate).

The use of ArrayGUI to collect reliable position estimates could be improved when applying this technology in the field, where researchers might desire reliable position estimates for as many recorded sounds as possible. When triangulation produces an unreliable result, the user can adjust the annotation window in ArrayGUI, possibly by selecting a different subsection of the sound, and then repeating the triangulation process until a reliable location estimate is found.

### **Comparison of GPS accuracy in the forest versus field**

As expected, GPS survey accuracy was higher in the field sites versus forest sites, probably due to the effect of the dense vegetation in the forest. Measured with an Ashtech ProMark 3 survey-grade GPS system, our overall accuracy was  $1.12 \pm 0.20$  m (mean  $\pm$  SE for  $n = 12$  sites with 4 microphone positions and 2 loudspeaker positions at each site). Accuracy at field sites ( $0.006 \pm 0.001$  m) was significantly higher than accuracy at forest sites ( $2.23 \pm 0.31$  m; Wilcoxon sign-rank test:  $Z = 5.1$ ,  $p < 0.0001$ ,  $n = 6$  forest and 6 field sites with 4 microphone positions

and 2 loudspeaker positions at each site). This difference may be responsible for the non-significant trend in better triangulation accuracy at field sites compared to forest sites.

### Notes on the three types of GPS data used in this study

We collected three types of Global Positioning System (GPS) data in this study.

- (1) The first were GPS data received by the integrated GPS in the Wildlife Acoustics Song Meters. These data were used by the firmware in the Song Meters to synchronize the recordings. We did not use these GPS data for spatial positioning. The GPS data collected by the integrated GPS unit can be extracted on a second-by-second basis to collect repeated position sample estimates to generate surveys of microphone positions. These data should be expected to have similar accuracy to our handheld surveys (see below).
- (2) The second were GPS data collected by the Ashtech ProMark 3 survey-grade GPS. These GPS data were used to sample the position of the four recorders and the two loudspeakers. We sampled the position of only one of the two stereo microphones for each Song Meter. Using a compass, we positioned all Song Meters so that one microphone faced directly north and the other directly south. We measured the distance between the two microphones (29.5 cm) and we subtracted this distance from the GPS position of the northern GPS-sampled microphone to calculate the position of the southern microphone. These survey-grade GPS data were used in the main paper.
- (3) The third were GPS data collected with handheld Garmin GPS60CSx units. These handheld units have lower survey accuracy than the survey-grade system. We used these handheld units for two purposes. First, we used these units dynamically in the field, to guide the placement of the four recorders when we set them up; this allowed us to quickly set up the recorders with separation distances of approximately 25m or 50m. Second, we used the handheld units to collect static surveys, just as we did with the survey-grade Ashtech system. We did this as a test of whether handheld recreational GPS units could be used as an alternative to survey-grade GPS units. Handheld GPS units are more affordable (hundreds of dollars) and already owned by many field researchers; survey-grade GPS units are more expensive (many thousands of dollars) and are more uncommon. We describe our comparison of the survey-grade Ashtech GPS system and the handheld Garmin GPS system below.

### Comparison of location accuracy using handheld GPS surveys of microphone positions

We surveyed microphone positions with a survey-grade Ashtech ProMark 3 system to conduct the analyses presented in the main paper. We were curious about whether handheld GPS units could be used to survey microphone positions at a more affordable cost. To that end, we also surveyed microphone positions using Garmin GPS60CSx handheld receivers. We attached these Garmin GPS units to the poles that the Song Meters were mounted on, and used the “track log” function to record the X and Y coordinates of the Garmin units every 5 seconds. We left the units in place for 20 to 40 minutes. This produced a cloud of points with substantial variation, as we expected for a non-survey-grade system. We downloaded and exported the points collected with these handheld units using Mapsource software (Garmin, Olathe, KS) and exported them into a spreadsheet. We then eliminated the 10% of points that were most distant from the geometric centre of the cloud of points. We then calculated the average X and Y position based on the remaining cloud of points. We did this for all microphones, and used ArrayGUI to triangulate the positions of all sound sources for playbacks that were conducted inside the areas bounded by the recorders. All settings were identical during these analyses, except the microphone positions were estimated with the handheld Garmin GPS units rather than the survey-grade Ashtech GPS units. This produced 1273 reliable position estimates (out of 3600 possible internal

position estimates; 35.4%). We then calculated the average distance between the estimated locations and the Ashtech GPS position of the loudspeaker for each type of sound. This produced a dataset consisting of 235 averaged position estimates.

Using handheld Garmin GPS units to sample microphone positions, the system had an overall location accuracy of  $4.22 \pm 0.22$  m for sounds broadcast inside the array (average across all reliable internal location estimates at 12 different locations). By contrast, using the survey-grade Ashtech GPS units to sample microphone positions, the system had an overall location accuracy of  $1.87 \pm 0.13$  m for sounds broadcast inside the array.

Therefore, handheld GPS units can be used to survey microphone positions with this system, but they produce lower accuracy than a survey-grade GPS system. Survey-grade GPS systems may not be accessible to many researchers, making a handheld GPS survey desirable if a reduced location accuracy is acceptable. We expect this accuracy could be improved if handheld GPS units were left in place for longer periods of time; whereas we surveyed each position for 20 to 40 minutes, surveys lasting many hours would be expected to produce more reliable microphone position estimates.

#### **Links to hardware and software used in this study**

Wildlife Acoustics website (manufacturer of GPS-enabled Song Meters model SM2 used to record sounds):

<http://www.wildlifeacoustics.com>

Ashtech website (manufacturer of survey grade ProMark II GPS used to survey microphone positions):

<http://www.ashtech.com>

Garmin website (manufacturer of handheld GPSMap60CSx GPS used to survey microphone positions):

<http://www.garmin.com>

Anchor Audio website (manufacturer of MiniVox loudspeaker used to play sounds):

<http://www.anchoraudio.com>

Syrinx-PC website (free software for annotating target sounds in long recordings):

<http://www.syrinxpc.com>

A reference manual for using ArrayGUI to locate animals based on multi-channel recordings is available through Daniel Mennill's website:


<http://www.uwindsor.ca/dmennill>

## References for online supplement


- Fitzsimmons LP, Foote JR, Ratcliffe LM, Mennill DJ (2008a) Frequency matching, overlapping, and movement behaviour in diurnal countersinging interactions of black-capped chickadees. *Animal Behaviour* **75**, 1913-1920.
- Fitzsimmons LP, Foote JR, Ratcliffe LM, Mennill DJ (2008b) Eavesdropping and communication networks revealed through stereo playback and an Acoustic Location System. *Behavioral Ecology* **19**, 824-829.
- Foote JR, Fitzsimmons LP, Mennill DJ, Ratcliffe LM (2008a) Male chickadees match neighbours interactively at dawn: Support for the social dynamics hypothesis. *Behavioral Ecology* **19**, 1192-1199.
- Foote JR, Fitzsimmons LP, Mennill DJ, Ratcliffe LM (2008b) Tied to the nest: Male black-capped chickadees decrease dawn chorus movement behaviour when their mate is fertile. *Animal Behaviour* **76**, 1227-1233.
- Lapierre JM, Mennill DJ, MacDougall-Shackleton EA (2011) Spatial and age-related variation in use of locally common song elements in dawn singing of song sparrows *Melospiza melodia*: old males sing the hits. *Behavioral Ecology and Sociobiology* **65**, 2149-2160.
- Mennill DJ, Burt JM, Fristrup KM, Vehrencamp SL (2006) Accuracy of an acoustic location system for monitoring the position of duetting tropical songbirds. *Journal of the Acoustical Society of America* **119**, 2832-2839.




**Figure S1.** Sound spectrograms showing examples of the sounds played back and recorded with a portable, wireless acoustic location system. Numbers in the spectrogram refer to the sounds identified above and in Table 1. An accompanying WAV file is available for download.

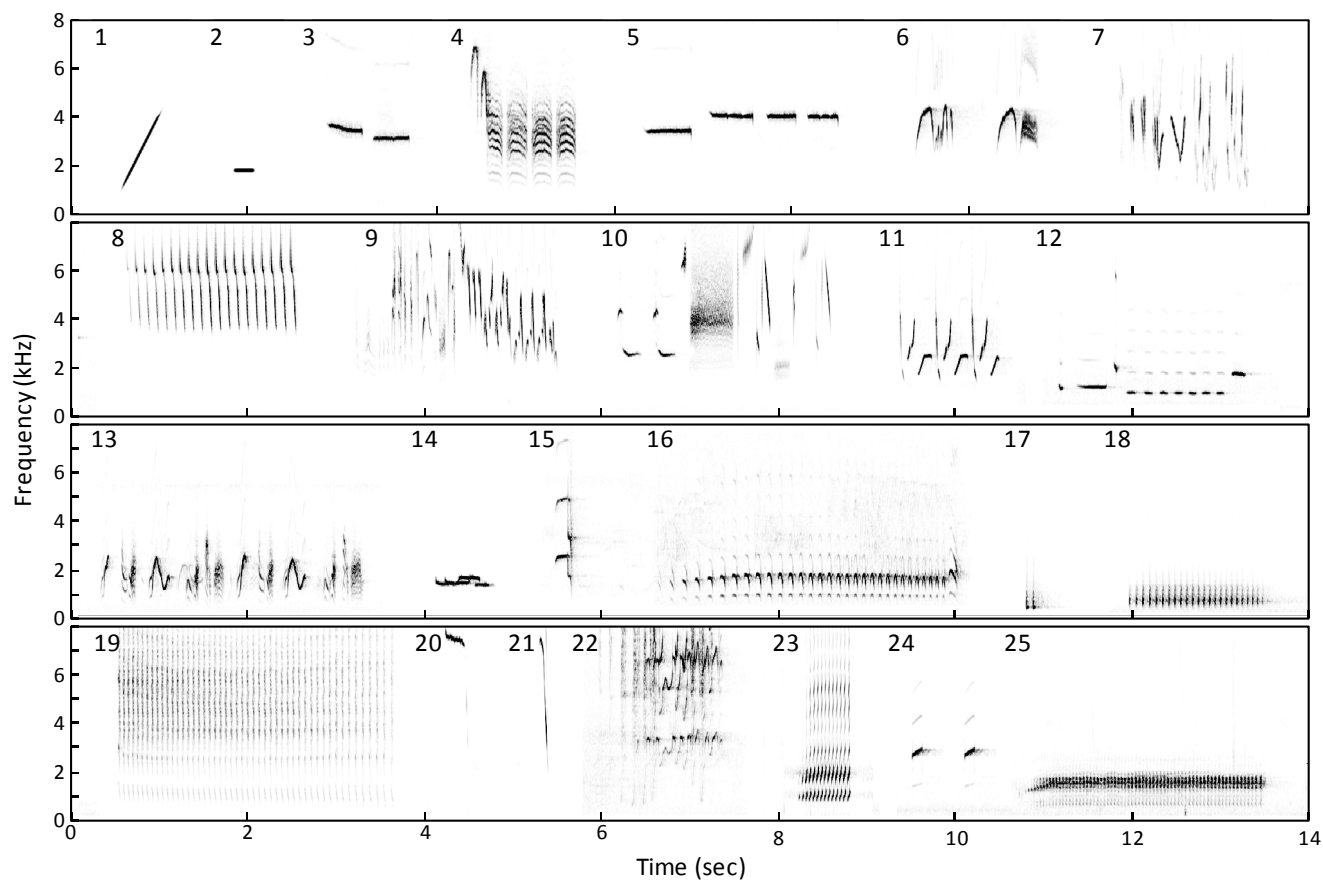

**Figure S2.** Examples of the graphical output of ArrayGUI triangulation software, showing both reliable and unreliable location estimates. Each map shows the UTM coordinates on the x-axis ( $\times 10^5$ ) and the y-axis ( $\times 10^6$ ). Numbers represent the positions of the eight microphones (pairs of numbers are overlapping because each recorder included two microphones). The coloured cloud shows a probability estimate of the estimated position of the sound source; a white circle shows the final position estimate. Reliable location estimates are shown in the top row; the coloured probability clouds showing estimated position are so small that they fill just a few pixels, and the ArrayGUI quality estimates are greater than our threshold of 0.7 (quality is shown in the top right). Unreliable location estimates are shown in the bottom row; the coloured probability clouds showing estimated position are extensive, and the ArrayGUI quality estimates are  $<0.7$ . (a) A reliable location estimate for an internal loudspeaker at an array with 25m microphone spacing in a forest habitat (sound type: Gray Tree Frog call). (b) A reliable location estimate for an internal loudspeaker at an array with 25m microphone spacing in a field habitat (sound type: Tree Swallow song). (c) A reliable location estimate for an external loudspeaker at an array with 50m microphone spacing in a forest habitat (sound type: Rufous-and-white Wren song). (d) A reliable location estimate for an external loudspeaker at an array with 50m microphone spacing in a field habitat (sound type: Eastern Red Squirrel call). (e) An unreliable location estimate for an internal loudspeaker at an array with 25m microphone spacing in a forest habitat (sound type: Black-capped Chickadee call). (f) An unreliable location estimate for an external loudspeaker at an array with 25m microphone spacing in a field habitat (sound type: descending sine wave). (g) An unreliable location estimate for an external loudspeaker at an array with 50m microphone spacing in a forest habitat (sound type: White-throated Sparrow song). (h) An unreliable location estimate for an internal loudspeaker at an array with 50m microphone spacing in a field habitat (sound type: Pileated Woodpecker drum).

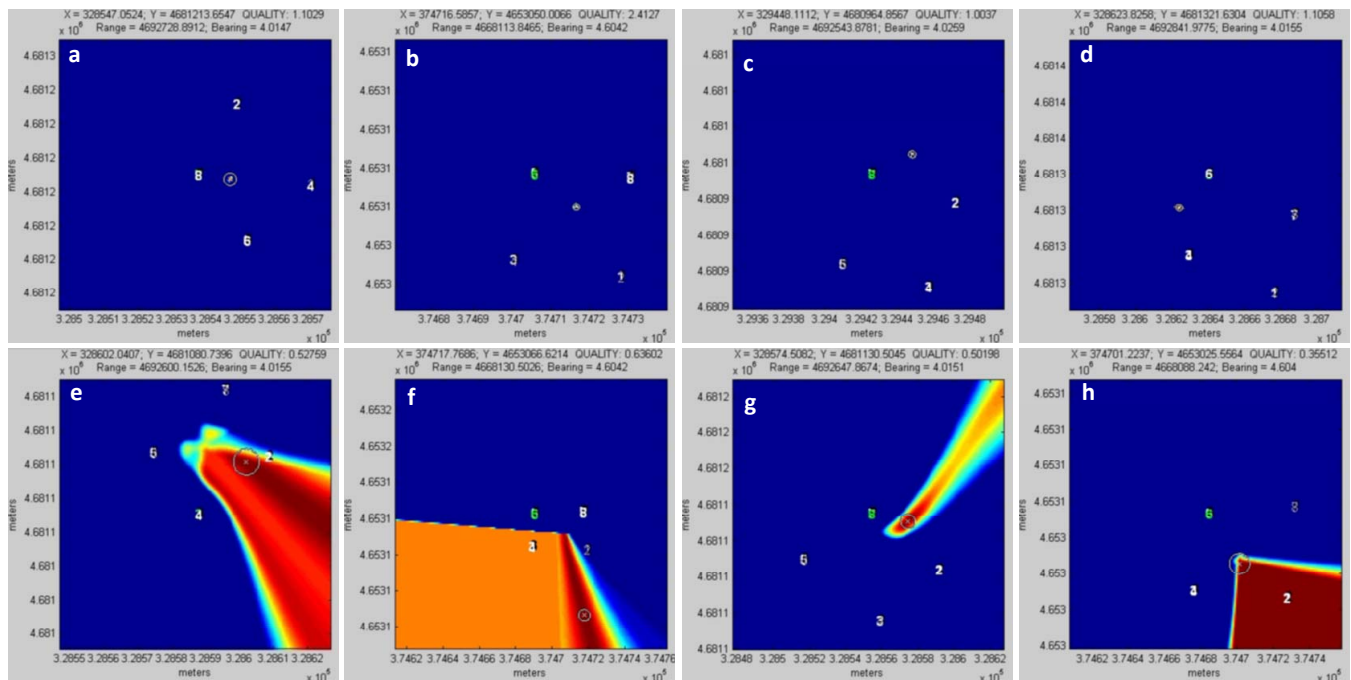

**Figure S3.** Photographs of GPS-enabled Song Meters used as a wireless microphone array. (a) A Song Meter attached to a tree showing a detachable GPS antenna (sitting on the top left and attached to the top of the recorder), two stereo microphones (on the sides of the recorder), the four D-cell batteries that power the recorder, four flash cards that store recordings, and a digital display used to program the recorder. (b) The four recorders with detachable GPS units easily fit in a small backpack.

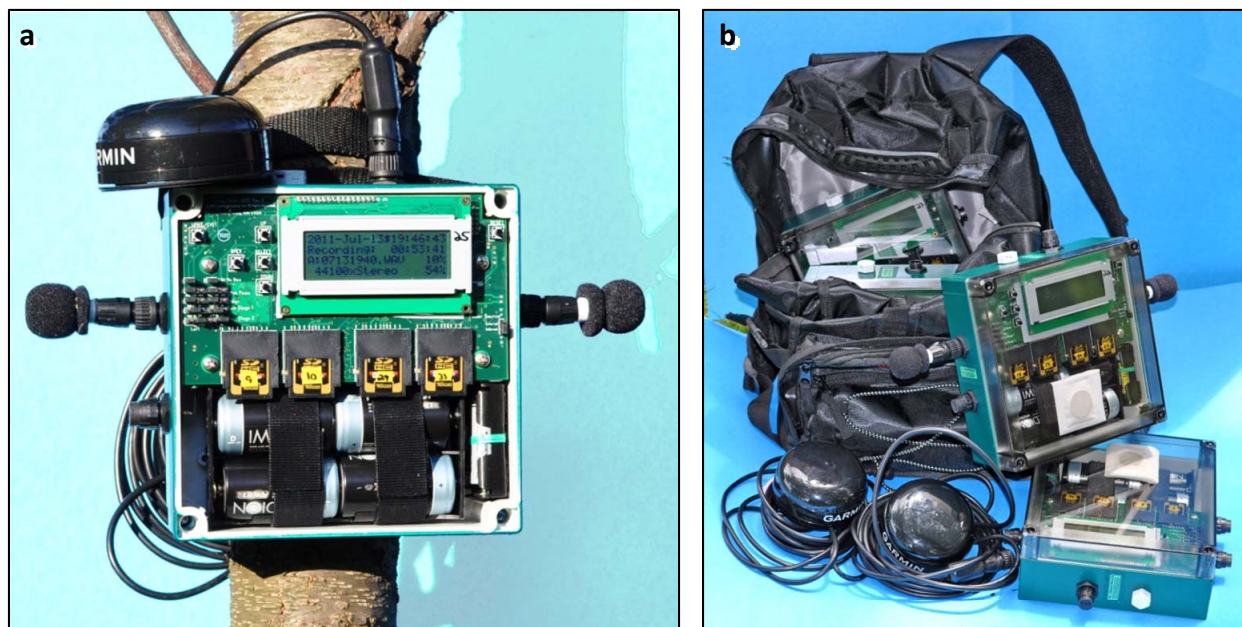

**Figure S4.** Maps of loudspeaker and microphone positions for the twelve deployments of the wireless microphone array. The top row (a-c) shows three deployments with approximately 25m between the microphones in a forest environment. The second row (d-f) shows three deployments with approximately 50 m between the microphones in a forest environment. The third row (g-i) shows three deployments with approximately 25 m between the microphones in a field environment. The fourth row (j-l) shows three deployments with approximately 50 m between the microphones in a field environment. For each array, recorder positions are shown with open circles (each recorder consisted of two stereo microphones), and loudspeaker locations are shown with blue squares (one inside the area bound by the four recorders and one outside the area bounded by the four recorders). Latitude is shown in UTM  $10^5$  and longitude is shown in UTM  $10^6$ .

